
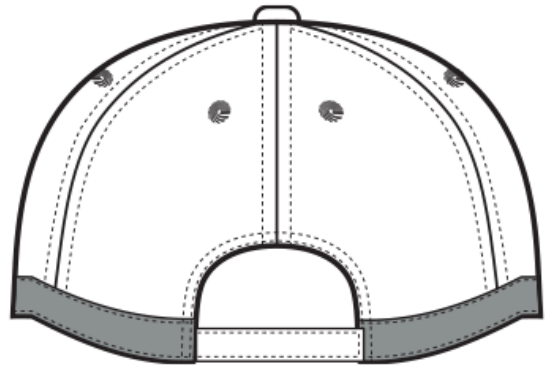


DECORATION SPEC SHEET

CornerStone

CS802 CornerStone® ANSI 107 Safety Cap

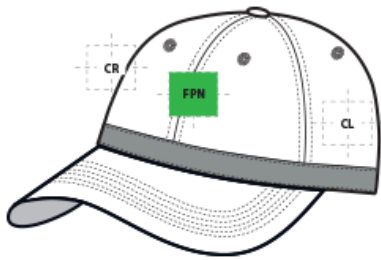

FRONT DECORATION DIMENSIONS

FPN	Front Panel	1" H x 5"W (max size)	Primary
------------	-------------	-----------------------	---------

SIDE DECORATION DIMENSIONS

CL	Cap Left	1"H x 4"W	
CR	Cap Right	1"H x 4"W	

Decoration range is dependent on product, decoration method and equipment used. Allow for 1/8" per size. Sizing is based off: Adult-L, Women's-M, Youth-L, Girls-M. Please consult with your decorator or supplier.

DECORATION TECHNIQUES



EMBROIDERY



HEAT TRANSFERS

DECORATION SPEC SHEET



CS802 CornerStone® ANSI 107 Safety Cap

ESSENTIAL PRODUCT INFORMATION

Due to the nature of polypropylene, special care must be taken throughout the decoration process when heat is applied for curing. Please consult with your decorator or material supplier.

TIPS FROM OUR EXPERTS BY DECORATION TECHNIQUE



EMBROIDERY

Embroidery is the art of embellishing a piece of apparel with a needle and thread or yarn creating stunning visual representations of various types of art. This is achieved by converting logos in a digitizing software and using various stitch patterns, angles, density and stitch types to create depth, movement and detail. Thread can be made from many materials. The most commonly used threads are polyester and rayon. There are also options such as metallic, cotton, nylon, silk and even Nomex thread for fire resistance. Embroidery has a very high-perceived value and is popular for use on most apparel, bags, hats, luggage, blankets and more!

Decoration is not recommended over reflective areas. Doing so may also violate OSHA requirements



HEAT TRANSFERS

A graphic, name and or number applied to a textile with a heat press. Great for quantities of any size, sports name and numbering, fashion, performance wear, print on demand programs and on-site decorating events.

Neon Colors - Heat transfers with low cure adhesive and bleed blockers are required for this product. Decoration is not recommended over reflective areas. Doing so may also violate OSHA requirements